

WIREFATH

BULK WIRE

NST-RG6-500-XXX

18AWG, RG6, CMG

Features

- CMG Rated RG6 Coax Cable
- Copper Clad Steel conductor
- Reel coiled with REELEX technology to ensure tangle-free pull
- Nest in box packaging

Application


- Satellite Installations
- CATV and HDTV
- Communications Circuits

Flame Test

- C(UL) Flame Test FT4

Applicable Standards

- NEC/(UL) Specifications CMG
- NEC Articles 800
- CEC/(UL) Specifications CMG

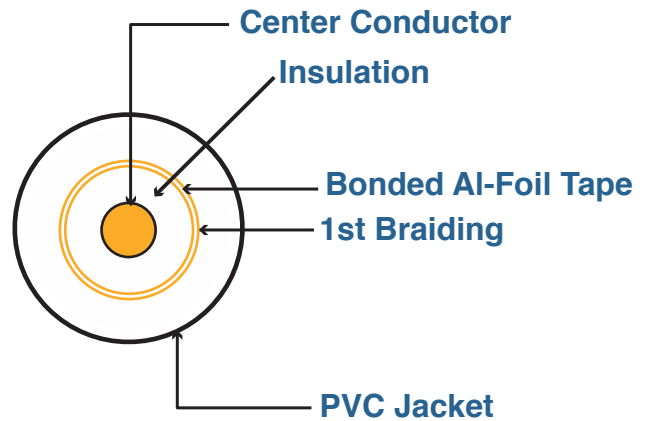

Usage & Environmental Condition

Temperature Range	Storage & shipping	-20°C to 75°C
	Installation	0°C to 60°C
	Operation	75°C

WIREFATH

BULK WIRE

Material and Construction		
Construction	Conductor	Copper Clad Steel
	AWG	18
	Diameter	1.02mm
Insulation	Material	Foam PE (Polyethylene)
	Thickness (mm)	1.78mm
	Insulation Diameter (mm)	4.57 +/- 0.08mm
	Color	As ordered
Shielding	Bonded AL-Mylar Shield	≥ 25%
	1st Braiding	Aluminium Wire (60% Coverage)
	Construction	16*4/0.16mm
Jacket	Material	PVC (Polyvinyl Chloride)
	Nominal	0.80mm +/- 0.15
	Minimum Thickness(mm)	0.6mm
	Cable Dia. (mm)	6.8 +/- 0.2

Physical & Electrical Characteristics (at 20°C)	
Cable cold bend	-20°C for 4 hr
Impedence (ohms)	75 +/- 3Ω
Capacitance (PF/m)	53.1
Conditional DCR at 20° C (ohms/km)	≤119Ω
Velocity of propagation	≥82

WIREFATH

BULK WIRE

Electrical Performance Characteristics	
Frequency (MHz)	Attenuation (db/100m)
5	2.66
55	5.25
250	11.02
300	12.14
350	13.15
400	14.11
450	15.03
500	15.88
600	17.52
1000	22.97
1250	25.00
2200	34.00