


Fire Alarm Cable 18AWG X 4

Cross Section

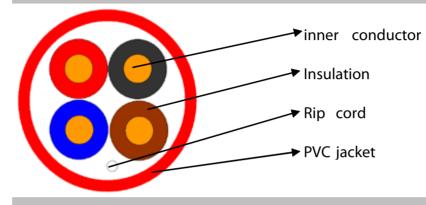

Application:

Structured cable products, Unshielded cable, CMG & FT4 Approva

- · · ·	· • •
Construction:	
4 core	Oxygen Free Copper Wire Solid
AWG	18
Stranding (wire NO./wire dia. mm)	1/1.02mm
Insulation:	
Material:	PVC
Thickness (mm):	0.25mm
Insulation Diameter (mm):	1.6mm
Color:	red, black, blue & brown
Ripcord	
Material:	Nylon (150D)
Jacket:	
Material:	PVC
Nominal Thickness (mm)	0.35 +/- 0.05
Cable Dia. (mm)	4.7
Color:	Red
Electrical Danformana	
Electrical Performance	
Operation Temperature (degree):	75
Voltage Rating (V):	300