


ASB6128

High Power
Dual 18" Subwoofer

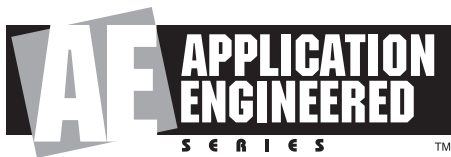

Key Features:

- ▶ 2 x 18" 2242H SVG™ Driver.
- ▶ Large vent area for high output with low distortion.
- ▶ Parallel/Discrete Switchable input mode.
- ▶ Arrays with various AE Series models (see AE Series Array Guide).

Applications:

- ▶ Performing arts facilities
- ▶ Theatrical sound design
- ▶ Auditoriums
- ▶ Houses of worship
- ▶ Live clubs
- ▶ Dance-clubs/discotheques
- ▶ Sport facilities
- ▶ Themed entertainment venues

ASB6128 is a high power subwoofer system comprised of two 460 mm (18 in) SVG Super Vented Gap low frequency drivers in a front-loaded, vented configuration. The deep cabinet allows for extended low frequency bandwidth with minimum frontal profile. The rectangular cabinet is fitted with M10 threaded suspension points. Pre-engineered array bracketry is available.

ASB6128 is part of JBL's AE Application Engineered Series, a versatile family of loudspeakers for a wide variety of applications.



Specifications:

System:	
Frequency Range (-10 dB):	28 Hz – 1 kHz
Frequency Response (±3 dB):	35 Hz – 1 kHz
Input Modes:	Drivers Parallel / Drivers Discrete
Transducer Power Rating (AES) ¹ :	2400 W (9600 W peak), 2 hrs
Long-Term System Power Rating ² :	1600 W (6400 W peak), 100 hrs
Maximum SPL:	30 Hz – 100 Hz: 136 dB-SPL cont avg (142 dB peak) 100 Hz – 500 Hz: 136 dB-SPL cont avg (142 dB peak)
System Sensitivity (dB-SPL, 1W @ 1m) ³ :	30 Hz – 100 Hz: 102 dB 100 Hz – 500 Hz: 102 dB
Nominal Impedance:	4 ohms in parallel-drive mode 2 x 8 ohms in discrete-drive mode
Transducers:	
Low Frequency Driver:	2 x JBL 2242H 460 mm (18 in) SVG™ drivers with 100 mm (4 in) voice coil
Physical:	
Enclosure:	Rectangular cabinet, 16 mm (5/8 in) exterior grade 11-ply Finnish birch plywood
Suspension Attachment:	12 points (3 top, 3 bottom, 2 each side, 2 rear), M10 threaded hardware
Finish:	Black DuraFlex™ finish. White available upon request.
Grille:	Powder coated 14 gauge perforated steel, with acoustically transparent black foam backing.
Input Connector:	NL4 Neutrik Speakon® and CE-compliant covered barrier strip terminals. Barrier terminals accept up to 5.2 sq mm (10 AWG) wire or max width 9 mm (.375 in) spade lugs. Speakon in parallel with barrier strip for loop-through.
Environmental Specifications:	Mil-Std 810; IP-x3 per IEC529.
Dimensions (H x W x D in vertical cabinet orientation):	1094 x 561 x 816 mm (43.1 x 22.1 x 32.2 in)
Net Weight:	73.0 kg (161 lb)
Optional Accessories:	M10 x 35 mm forged shoulder eyebolts with washers. Optional planar array frame kit. See AE Series Bracket Guide

¹AES standard, one decade pink noise with 6 dB crest factor within device's operational band, free air. Standard AES 2 hr rating plus long-term 100 hr rating are specified for low-frequency transducers.

²AES standard, one decade pink noise with 6 dB crest factor, in cabinet, long-term 100 hr rating.


³Calculated based on power rating and sensitivity, exclusive of power compression.

⁴Half-space (2π) loading, averaged in specified frequency band.



JBL continually engages in research related to product improvement. Changes introduced into existing products without notice are an expression of that philosophy.

▶ ASB6128 High Power Dual 18" Subwoofer

Frequency response is measured on-axis at a distance referenced to 1 m @ 1 watt (2.0 Vrms) input, shown as half-space (2π , solid line) and full-space (4π , dotted line) environment.

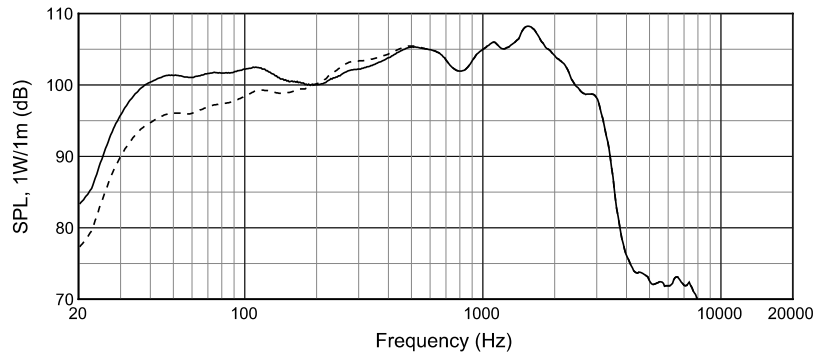


Electrical Input Impedance (parallel mode)

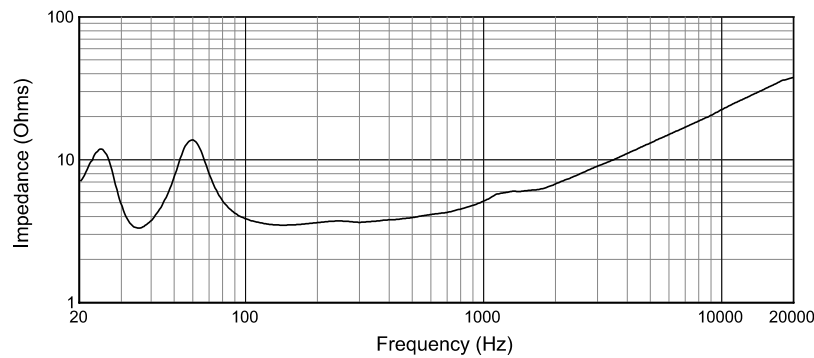


Dimensions in mm (in).

For more detailed dimensional information, refer to Application Data Sheet.


For AE & AE Compact Series WRC and WRX versions please visit the JBL Pro website at <http://www.jblpro.com/www/products/installed-sound/ae-series#.V63kVfkrLIV> to download Drawings.



Front



Side



Back



JBL Professional
8500 Balboa Boulevard, P.O. Box 2200
Northridge, California 91329 U.S.A.

A Harman International Company
© Copyright 2016 JBL Professional

SS ASB6128
CRP 10M
8/16