


SPEAKER CABLES

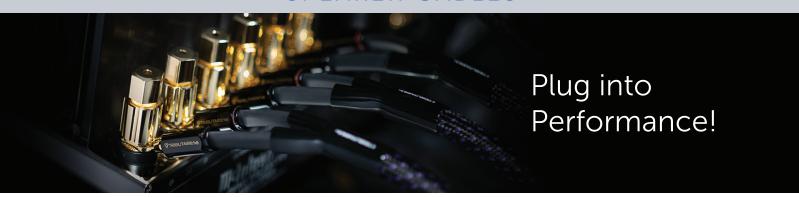

Tributaries high performance speaker cables are a unique design by Jay Victor optimized for superior sound quality. Starting with the same conductor criteria as Tributaries audio cables; speaker cable designs incorporate high performance copper with insulated multi-gauge conductors sharing the same sonic traits resulting in a sound which is more frequency balanced.

Star-Quad Geometry

Tributaries Series 4, 6 and 8 speaker cables all include a Star-Quad design. Star-Quad speaker cables are designed with four conductors, all wound together, in a "positive, negative, positive, negative" configuration. The cable is produced such that all 4 wires are evenly twisted together keeping each conductor the same distance from the center and ensuring each positive conductor is next to each negative conductor. The net result is the cancellation of opposing electromagnetic fields generated by each conductor pair. This design improves the system's performance by preventing EMI noise from entering and distorting the signals in nearby low level audio, video or digital cables. Another benefit of the Star Quad design is the reduction of the cable's inductance, again, improving the cables electrical performance and reducing the distortion it produces.

Special attention to cable geometry is given to the design of speaker cables. Speaker cables carry high current signals that are susceptible to magnetic fields. As a signal travels along a wire it creates a magnetic field that increases with signal voltage. This self-inductance impedes the signal by virtue of its inductive reactance. Star-Quad design cancels magnetic fields and improves the sound quality of your system.



Resistance

Resistance is another consideration when choosing a speaker cable. In simple terms: the larger the diameter of the cable or conductor; the lower the resistance. Cable resistance is expressed in ohms per unit. For instance, 500 feet of 16-gauge wire has a resistance of about 4 ohms. With speaker cables this becomes an issue. Because speakers exhibit input impedances in the range of 2 to 8 ohms, the resistance of the cable can add significantly to the overall load. For example, if a 4-ohm speaker is connected to an amplifier with a cable that exhibits a 4-ohm resistance, the cable will dissipate half of the amp's power before it even gets to the speaker! Tributaries offers a full line of speaker wire with gauges from from 11AWG to 16 AWG for your consideration. Below is a handy guide for choosing the correct size speaker wire for your unique installation.


Maximum Wire Lengths for Two Conductor Copper Wire

Wire Size	2 Ω load	4 Ω load	6 Ω load	8 Ω load
16 AWG	12 ft	24 ft	36 ft	48 ft
14 AWG	20 ft	40 ft	60 ft	80 ft
12 AWG	30 ft	60 ft	90 ft	120 ft
10 AWG	50 ft	100 ft	150 ft	200 ft



SPEAKER CABLES

For speakers with only a single pair of rear panel terminals, we combine the four conductors of the Star-Quad cable into two at each end of the cable. In this set up, when used as a full range cable, the Star Quad Design (Negative + Negative / Positive + Positive) will reduce distortion over using a standard twisted pair speaker cable. Plus, when doubling the conductors, the amount of metal is doubled as well. The larger size conductor will lower the cable's resistance and provide higher current capability resulting in an increase in low frequency performance. Lowering the inductance and resistance means it's easier for the amp to drive the signal down the cable. Sonically, the sound is smooth and fluent as well as more dynamic, due to better definition. Tributaries Speaker cables are sold in each.



©TRIBUTARIES®



SERIES 4 STAR-QUAD SPEAKER CABLE

MODEL:4SP

High Performance Speaker Cable

All Series 4 audio cables are meticulously assembled by hand in Orlando, Florida. Series 4 Star-Quad Speaker cables begin with ultra-pure highly conductive oxygen-free copper (HC-OFC) developed specifically for audio applications. Two 12AWG speaker conductors are the result of combining a 16AWG and 14AWG conductors opposite each other in a 4 conductor Star-Quad speaker arrangement. In the Star-Quad design Magnetic distortion is canceled by twisting strands clockwise and then wrapping the bundles counter-clockwise around one insulated large solid conductor. Tributaries Series 4 Star-Quad design results in a high performance speaker cable that looks as good as it sounds

The Series 4 Star-Quad Speaker cable is stocked in each in lengths from 4 foot to 12 foot lengths with custom lengths available. Available terminated with Spade Lugs or Banana Plugs

Model 4SP Highlights

Assembled by hand with foreign and domestic parts in Orlando Florida, USA

Star-Quad design reduces cable inductance and distortion

Two 12AWG HC-OFC conductors for superior signal transfer

Sophisticated multi-gauge design for superior bass, mids & highs

Insulated solid conductor eliminates distortion with stranded bundles

Available terminated with spade lugs or banana plugs

Decorative woven jacket over a UL® CL2 PVC jacket

8888

Tributaries Cable: 6448 Pinecastle Blvd. Suite 101, Orlando, FL 32809

Phone: (888) 554-2514 or (407) 855-0497 - Fax: (800) 553-1366 or (407) 855-2482

Sales: sales@tributariescable.com