


Fire Alarm Cable

18AWG X 2

Cross Section

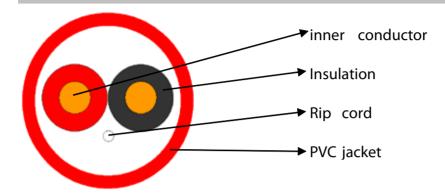

Application:

Structured cable products, Unshielded cable, CMG & FT4 Approva

Construction:

2 core Oxygen Free Copper Wire Solid

AWG 18

Stranding (wire NO./wire dia. mm) 1/1.02mm

Insulation:

Material: PVC
Thickness (mm): 0.25mm
Insulation Diameter (mm): 1.6mm
Color: red & black

Ripcord

Material: Nylon (150D)

Jacket:

Material: PVC

Nominal Thickness (mm) 0.35 +/- 0.05

Cable Dia. (mm)

Color: Red

Electrical Performance

Operation Temperature (degree): 75 Voltage Rating (V): 300