

#### **Professional Series**

## **Key Features:**

- ► Weather-Resistant, All Fiberglass Enclosure
- ▶ 120° x 60° Coverage
- ▶ 2265H Differential Drive® Low-Frequency Driver
- ▶ 2432H High Frequency Compression
- ► Large PT<sup>TM</sup> Progressive Transition waveguide for excellent pattern control and low distortion
- ► Rotatable waveguide for vertical or horizontal orientation
- Available in Gray and Black finish
- ▶ 400 W, 70/100V Transformer Included
- ► U-type Mounting Bracket Included

## **Applications:**

- Sports Facilities
- ► Themed Entertainment Venues
- Outdoor Entertainment Centers
- Cruise Ships
- ▶ Water Parks

The AW526 is a high power, lightweight, 2-way, full-range loudspeaker system comprised of the JBL Differential Drive dual voice coil and dual magnetic gap 2265H 380 mm (15 in) low-frequency driver and 2432H high-frequency 38 mm (1.5 in) exit, 75 mm (3 in) voice-coil compression driver. The large format Progressive Transition wave-guide provides excellent 120° x 60° coverage. The waveguide is rotatable so the loudspeaker system can used in either the vertical or horizontal orientation. The system can be operated as an 8-ohm device and is equipped with a 400W transformer for 70/100V applications.

A corrosion-resistant extra-thick zincplated polyester powder coated U-type mounting bracket is included.

The enclosure is constructed of multilayer glass composite and is heavily braced to maximize lowfrequency performance. The 16-gauge stainless steel grille, backed with open cell foam and stainless steel mesh, provides excellent protection in the harshest environments.

The AW526 is part of JBL's AE Series, a versatile family of loudspeakers intended for a wide variety of applications.



## **Specifications:**

| 1  |  |
|--|--|
| System:  |  |
| Frequency Range (-10 dB):                                    | 35 Hz – 20 kHz   |
| Frequency Response (±3 dB):                                  | 55 Hz – 17 kHz   |
| Coverage Pattern:  | 120° x 60°, rotatable waveguide  |
| Directivity Factor (Q):                                      | 7.9  |
| Directivity Index (DI):                                      | 9 dB   |
| Crossover Frequency:   | 1.1 kHz  |
| Long-Term System Power Rating (IEC)1:                        | 600 W (2400 W peak), 100 hrs   |
| Maximum SPL <sup>2</sup> :                                   | 128 dB-SPL cont avg (134 dB peak)  |
| System Sensitivity (1W @ 1m) <sup>3</sup> :                  | 100 dB   |
| 70V / 100V Transformer Taps <sup>4</sup> :                   | 70V: 400 W, 200 W, 100W<br>100V: 400W, 200W  |
| Transducers:   |  |
| Low Frequency Driver:  | 1 x JBL 2265H 380 mm (15 in.) Differential Drive* driver with 75 mm (3 in) dual voice coil   |
| Nominal Impedance:   | 8 ohms   |
| Sensitivity <sup>3</sup> (1W @ 1m, within operational band): | 98 dB SPL  |
| High Frequency Driver:                                       | JBL 2432H, 38 mm (1.5 in) exit compression driver, 75 mm (3 in) voice coil   |
| Nominal Impedance:   | 8 ohms   |
| Sensitivity <sup>6</sup> (1W @ 1m):                          | 113 dB SPL   |
| Waveguide:   | PT-H126HF-1  |
| Physical:  |  |
| Enclosure:   | Hand-Laminated Fiberglass, gray gelcoat (similar to Pantone 420C), available in black (-BK)  |
| Suspension Attachment:                                       | 2 x M10 for Included U-Bracket, 2 x M6 for aiming stabilization, 1 x M10 on rear for safety.   |
| Grille:  | Three layer grille assemblies consisting of 16-gauge powder coated stainless steel, backed with open cell foam and stainless steel mesh.     |
| Input Connector:   | CE-compliant covered barrier strip terminals. Barrier terminals accept up to 5.2 sq mm (10 AWG) wire or max width 9 mm (.375 in) spade lugs. |
| Environmental Specifications:                                | IP55C per IEC 529  |
| Dimensions (H x W x D in horizontal cabinet orientation):    | 485 x 810 x 478 mm<br>(19.1 x 31.9 x 18.8 in)  |
| Net Weight:  | 28.3 kg (62.5 lb)  |
|  |  |

IEC standard, full bandwidth pink noise with 6 dB crest factor, 100 hours.


\*Calculated based on power rating and sensitivity, exclusive of power compression.

\*Anechoic sensitivity in free field, no additional sensitivity gain from boundary loading.


Per EN54-24 Components of voice alarm system - loudspeakers 70V/400W (35V RMS, 70V peak), 100V/400W (50V RMS, 100V peak) JBL continually engages in research related to product improvement. Changes introduced into existing products without notice are an expression of that philosophy.

# ► AW526 High Power 2-Way All Weather Loudspeaker with 1 x 15" LF


#### Beamwidth

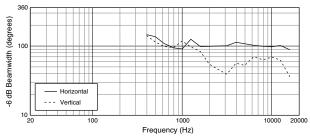

### Horizontal Off-Axis Frequency Response Right

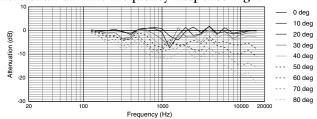

### Horizontal Off-Axis Frequency Response Left

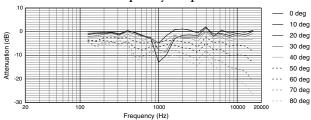


#### Dimensions


Dimensions in mm (in)

For more detailed dimensional information, refer to Application Data Sheet


# Frequency Response and Impedance

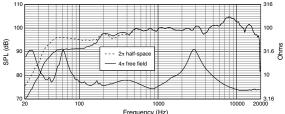


#### Vertical Up Off-Axis Frequency Response

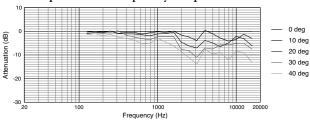


#### Vertical Down Off-Axis Frequency Response

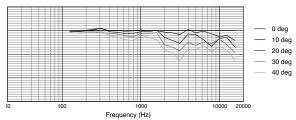


### Directivity Index, Q

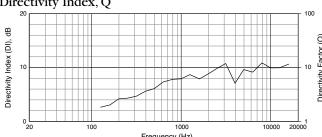

Measurements obtained in full passive crossover mode with no signal processing. Graphs are from unaltered measured data.

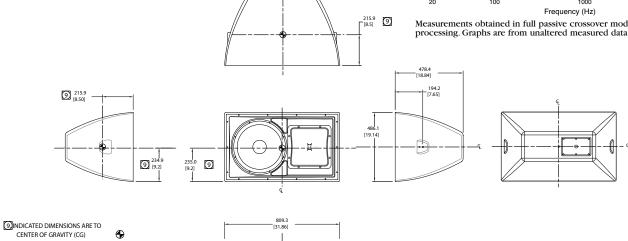



### Horizontal 1/3 Octave Polars

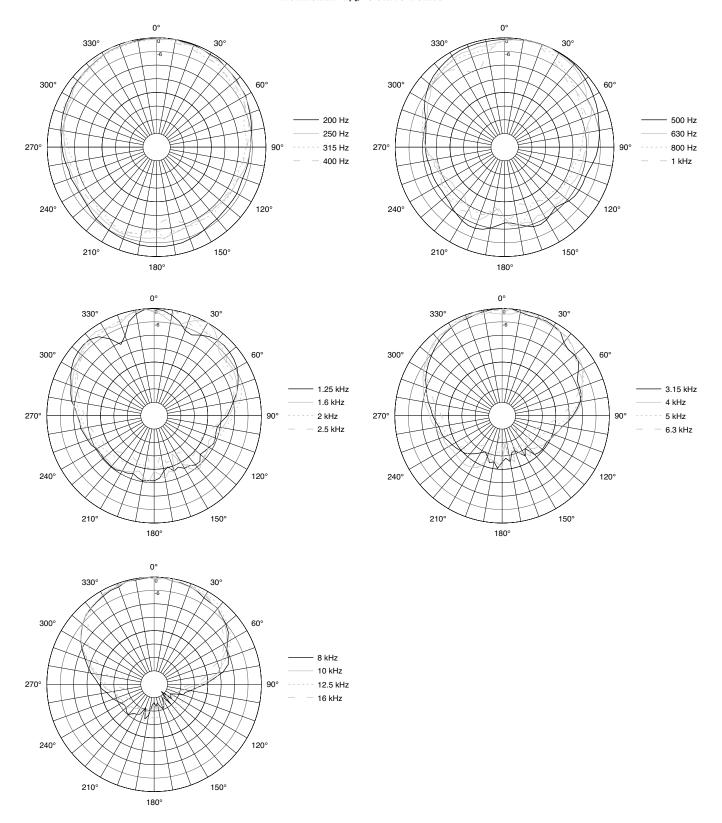



# ► AW526 High Power 2-Way All Weather Loudspeaker with 1 x 15" LF


#### Vertical 1/3 Octave Polars

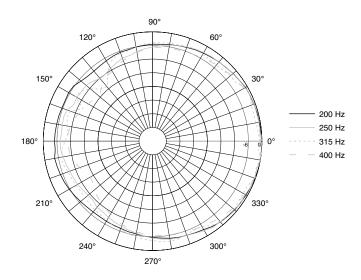

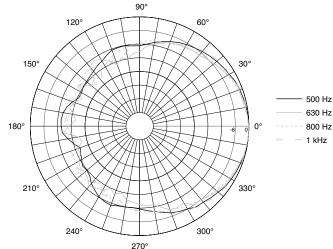

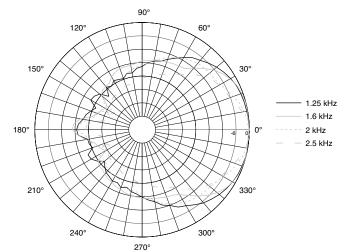

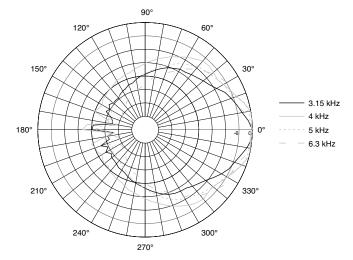

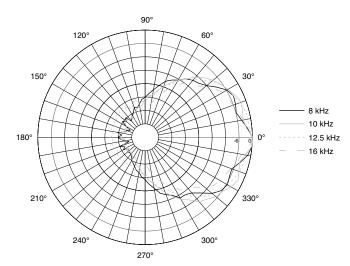



JBL Professional 8500 Balboa Boulevard, P.O. Box 2200 Northridge, California 91329 U.S.A. © Copyright 2014 JBL Professional www.jblpro.com